


THE HENKE HELPER

UTILITY DOZER BLADE FOR WHEEL LOADERS

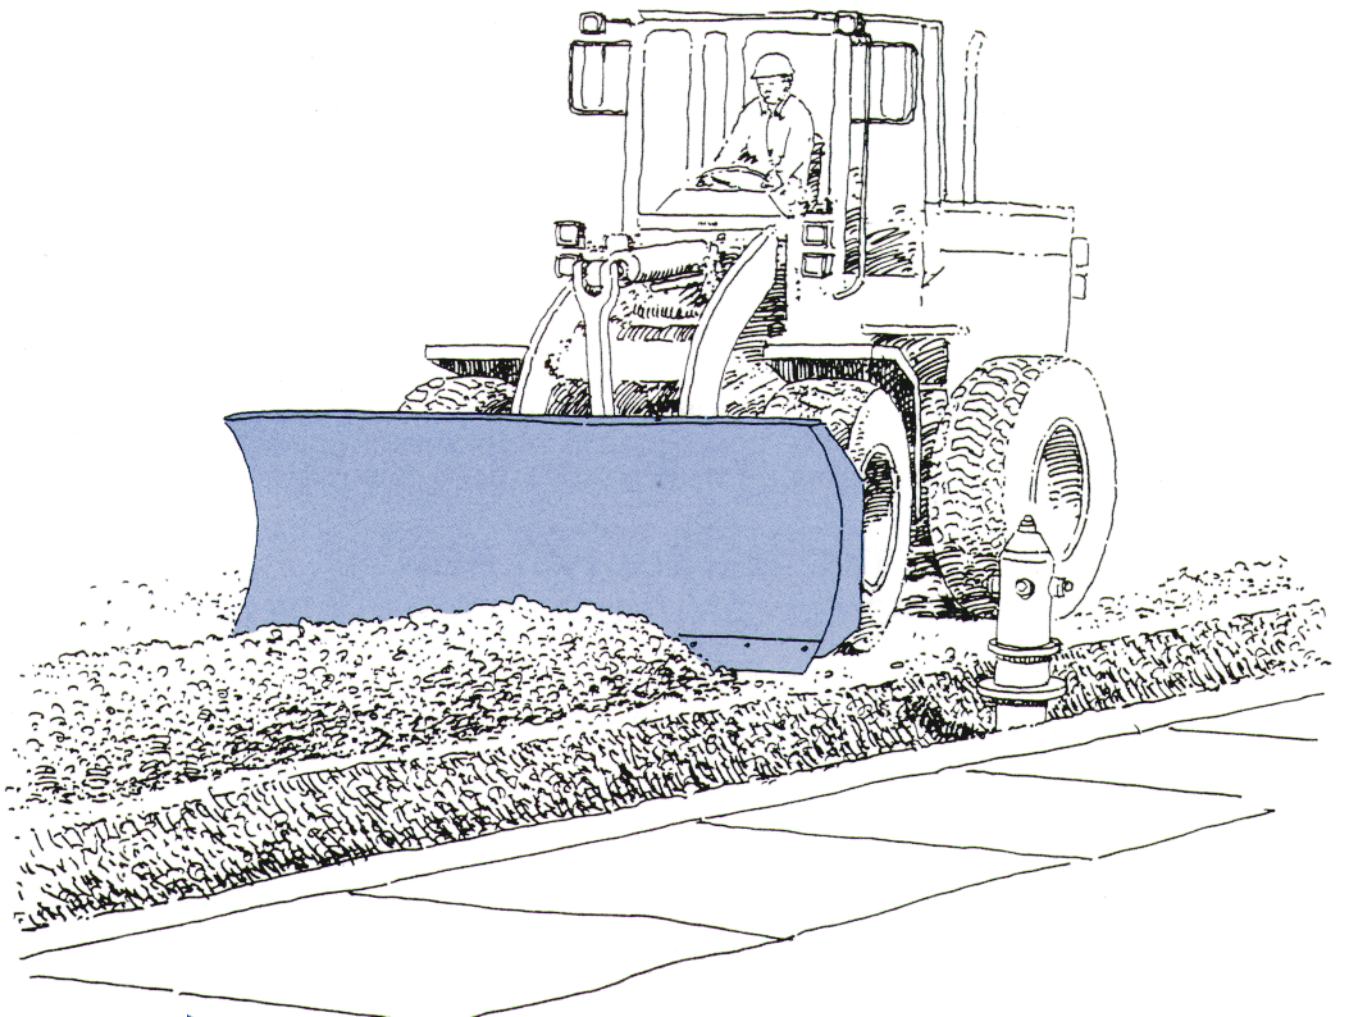

HENKE MANUFACTURING CORPORATION

MANUFACTURES OF SNOW REMOVAL EQUIPMENT FOR 70 YEARS

BOX 709 • 3070 WILSON • LEAVENWORTH, KS 66048 • PHONE (913) 682-9000 • FAX (913) 682-0300

THE HENKE HELPER

HEAVY DUTY
MULTI-
PURPOSE
DOZER
BLADE FOR
WHEEL
LOADERS



For most of the construction equipment industry, it is hard to envision a wheel loader

without a bucket on the front. However, as every operator will tell you, buckets are the wrong attachments for grading, leveling and spreading light weight materials commonly done in parks, along roadsides, in vacant lots, etc.

THE HENKE HELPER SPECIFICALLY DESIGNED FOR UTILITY DOZER BLADE FUNCTIONS

- Blade 41" high, in 8', 10' and 12' lengths, with manual or hydraulic power reverse.
- Multiple box reinforced 1/4" moldboard with 1/2" ribs, full length 7 x 22.7#/ft. S&C Channel, 3/4 x 6 x 4" bottom angle. Intermediate 1/2" ribs support center channel and bottom angle.
- Moldboard exterior fully welded: 1/2" rib end caps, 1/4" moldboard, and reinforced backside panels.
- 3/4" gusseted bearing plate assembly includes 3/4 x 30 x 22" mounting plate welded to full length structural channel and intermediate ribs.
- Cylinders are 4" by 20 3/4" double acting, with 2" chrome plated rods, with replaceable and adjustable chevron style vee gland packing.
- 3/4" back plate designed to accommodate wide variety of couplers and ears for quick attachment to designed wheel loader.

ESTIMATED WEIGHT (LBS.)	LENGTH	8'	10'	12'
	HYDRAULIC REVERSE	2600	2850	3100
	MANUAL REVERSE	2500	2850	3000